

Brodersen RTU32M Modular RTU DO08R Relay Output Card (8 Channel)

Data Sheet
November 2019



DO08R 8ch Relay Outputs (NC/C/NO)

This module provides 8x relay output channels (N.O. / Common / N.C.).

Connectors

2x 12 way 3.5mm Phoenix MC pluggable screw clamp connector for relay outputs.

One dual colour LED on front for module status.

Output terminals layout are as follows:

Connector A:

- Pin 1: Relay output 1 NO.
- Pin 2: Relay output 1 Common
- Pin 3: Relay output 1 NC
- Pin 4..6: Relay output 2 NO/C/NC.
- Pin 7..9: Relay output 3 NO/C/NC.
- Pin 10..12: Relay output 4 NO/C/NC.

Connector B:

- Pin 1..3: Relay output 5 NO/C/NC.
- Pin 4..6: Relay output 6 NO/C/NC.
- Pin 7..9: Relay output 7 NO/C/NC.
- Pin 10..12: Relay output 8 NO/C/NC.

Specification:

8x mechanical non latching relay outputs, SPDT, are provided.

Load voltage:

Max 125 VDC.

Load current resistive:

0.25A @ 125VDC, 1.5A @48VDC, 2A @ 30VDC.

Output delay:

typical 5 ms.

Isolation:

2000 VAC output to electronics, 1 minute.


Ambient temperature range:

-25°C to +70°C


Module Power Requirements:

25mA @ 12V plus 10mA for each activated relay output.

Example Wiring Diagram

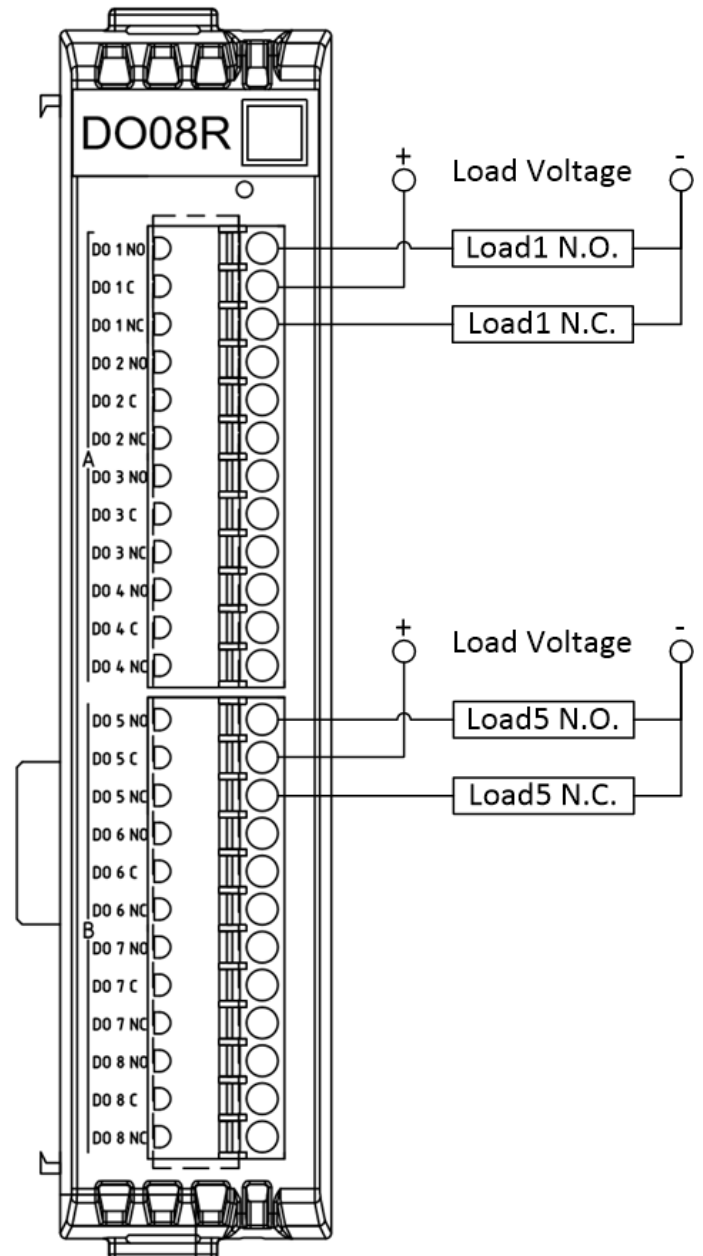

OVERVIEW OF RTU32M RANGE

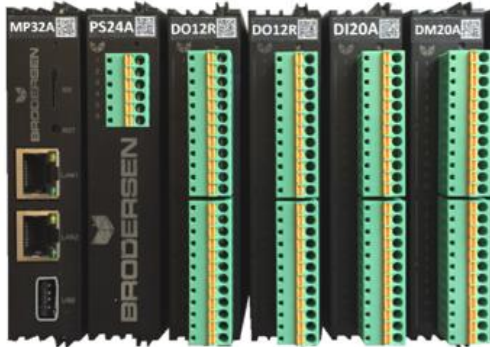

Brodersen Modular RTU32M Series with advanced RTU/PLC functionality.

The RTU32M series is based on an embedded 32-bit industrial platform providing flexible RTU functionality for a wide range of remote monitoring and control applications in the utility and infrastructure markets.

Each RTU32M comprises of a CPU module, power supply module and the desired mix of IO modules and system modules, as required.

The RTU32M supports a variety of standard and open protocols such as Modbus, IEC60870, IEC61850 and DNP3. It also includes the fast event based Binding protocol - a fast and reliable way to distribute time stamped event data between any Brodersen RTU32M in the network.

The RTU32M has a web server configuration interface for setup of the RTU 'personality' eg. IP address, IO range, Slave address etc. Additional RTU functionality, including logic, messaging and logging are configured in the Brodersen WorkSuite.

Each module is housed in a robust plastic enclosure suitable for DIN rail mounting. The RTU32M modules are 110mmH, 25mmW and 110mmD.



The RTU32M power supply module operates from 10-30VDC. The local IO bus supports up to 250 I/O modules.

FEATURE LIST

- Modular RTU with or without integrated I/O and communication device.
- Reliable Real Time Operating System.
- Communication Protocols Supported;
 - Full Modbus suite.
 - IEC60870-5-101/103/104
 - IEC61850 Client / Server Protocol.
 - DNP3 Master and DNP3 Slave.
 - Binding - Global Distribution and Subscription of Event Based Time Stamped Variables.
- Communication Protocols can also be created as part of the logic application interface.
- Communication interfaces; 2 x Ethernet 10/100, 1x USB are featured on the CPU module.
- Full EN/IEC61131 PLC runtime – also used for special and flexible data manipulation.
- Includes power supply monitoring of the RTU32M supply voltage and temperature
- Support for redundant power supplies
- Hot swappable IO.
- Full remote management of configuration, programming and flexible distribution of all levels of software from and to RTUs at remote locations.



EMC, Safety and Environmental

EMC: IEC 61000-6-2, IEC 61000-6-4
Safety Requirements: IEC 60950-1


Climatic:
 - Damp Heat: IEC 60068-2-30
 - Damp Heat Steady: IEC 60086-2-3
 - Dry Heat: IEC 60086-2-2

Mechanical:
 - Vibration: IEC 60255-21-1
 - Shock: IEC 60068-2-27
 - Shock and Bump Test: IEC 60255-21-2


Maximum frequency, 5KHz @ 10..30VDC input.

Isolation:
 2000 VAC input to electronics, 1 minute.

Module Dimensions

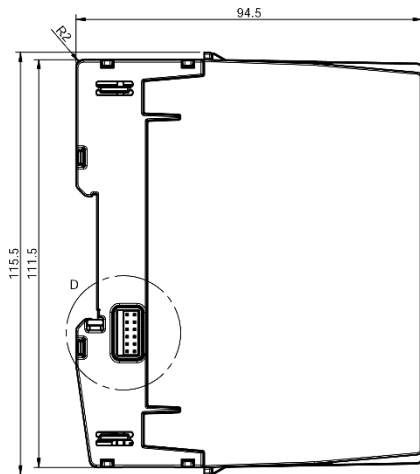


Backplane & I/O module side view

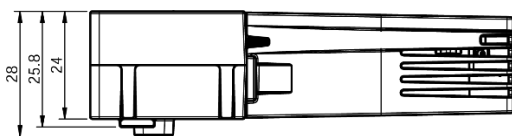

Backplane & I/O module top view


Assembling BUS and I/O modules

Backplane modules are assembled by gently pressing them together with hands, no tools needed.

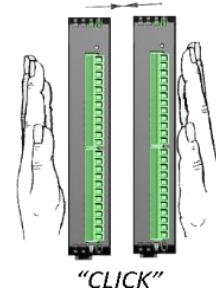

Separating modules

If two backplane modules need to be separated, use a flathead screwdriver. Push it in between the backplane modules and rotate it gently to allow the modules to be pulled apart.

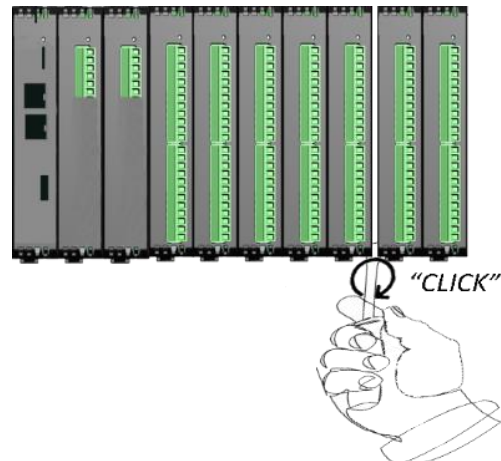



Module LED pattern

A two color (red/yellow) LED is provided on each module. This indicates the module status with different blinking patterns. The yellow color indicates the module mode (run, stop). The red color indicates module errors or warnings. Each pattern / color will operate in 2 second duty cycles. When the red LED is inactive (off), only the 2 second yellow duty cycle will operate (yellow is always active). When the red LED is active, a switch between 2 seconds of yellow, and 2 seconds of red patterns will occur.

LED	Pattern
Off	LED is constantly off
On	LED is constantly on
Blinking	LED is flashing, 200 ms on, 200 ms off
Flickering	LED is flashing, 50 ms on, 50 ms off
Single Flash	LED pattern is, 200 ms on, 1800 ms off
Double Flash	LED pattern is, 200 ms on, 200 ms off, 200 ms on, 1400 ms off
Triple Flash	LED pattern is, 200 ms on 200 ms off, 200 ms on 200 ms off, 200 ms on 1000 ms off
Quadruple Flash	LED pattern is, 200 ms on 200 ms off, 200 ms on 200 ms off, 200 ms on 200 ms off, 200 ms on 600 ms off

Yellow I/O module LED Codes:

Yellow LED	Pattern Description
Off	No module power
On	Module is Operational mode.
Blinking	Module is in Operational Timeout, caused by missing RTU heartbeat "timeout from CPU to I/O module". Outputs will be managed according to failsafe configuration (Last state, forced On, forced Off)
Flickering	NA
Single Flash	No valid node ID. Normal after power up.
Double Flash	Module is assigned a valid node ID, and is Stopped .
Triple Flash	NA
Quadruple Flash	Module is in firmware update mode.

RED I/O module LED Codes:

Red LED	Pattern Description
Off	No warnings or errors.
On	Module LB2 communication error. A number of LB2 communication errors has occurred, which has caused the LB2 error counters to reach the error level. The module will automatically stop any transmission on the bus, to prevent LB2 bus corruption for other modules (nodes). The module will still listen for NMT commands, and a communication reset command will reconfigure module configuration / communication, if the error was temporary.
Blinking	NA
Flickering	Corrupted module information / calibration data in EEPROM. Fatal error
Single Flash	Module communication error warning. A number of LB2 communication errors has occurred, which has caused the LB2 error counters to reach the warning level. A number of successful communications will automatically reset this warning.
Double Flash	NA
Triple Flash	NA
Quadruple Flash	NA